






SUB 18A

POWERED SUBWOOFER

Subwoofer series takes advantage of tremendous experience in touring, installation and mobile markets. Cabinets are equipped with next-generation transducers with reinforced moving system capable of withstanding tremendous pressure and excursion while keeping distortion in check.

Sub 18A is a powered subwoofer for mobile sound reinforcement and small and mid-sized installations. Equipped with 18" long excursion woofer, it is capable of impressive power output and very low frequency threshold.

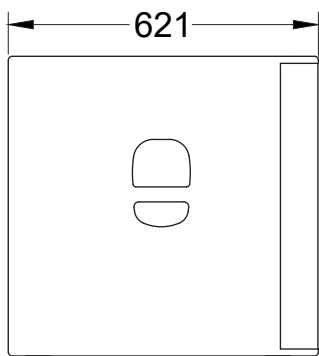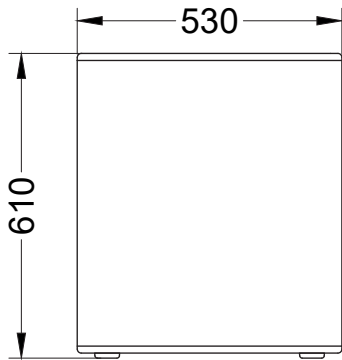

Main features:

- 2400 W amplifier power
- 18" woofer with 4" voice coil
- Efficient vented box design
- 138 dB Max SPL
- M20 distance pole adapter

Frequency Response (-10dB)	31 - 170 Hz
Max SPL (calculated)	138 dB
LF Driver	18", 4" VC
Amplifier power	2400 W
Amplifier	Class D, fan cooling, DSP
Input sensitivity	0 dBV (1 V RMS)
Connectors	XLR input, XLR output, Powercon mains
Dimensions (W×H×D)	530x610x621 mm
Net weight	45 kg
Shipping weight	48 kg
Mounting	M20 distance pole adapter
Enclosure material	Plywood; wear-resistant paint
Grill	Steel grill, acoustically transparent foam

With dedication to constant improvement of the products, manufacturer may change the listed specifications without prior notice